
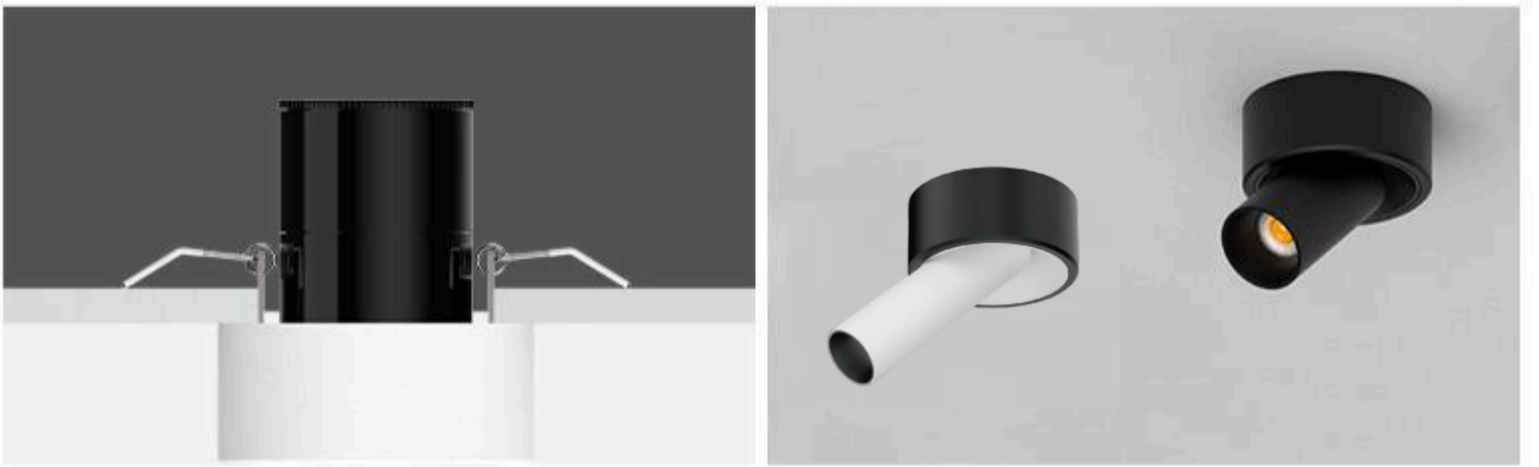


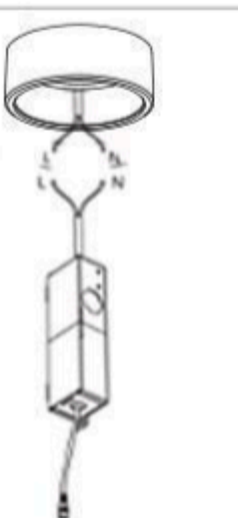
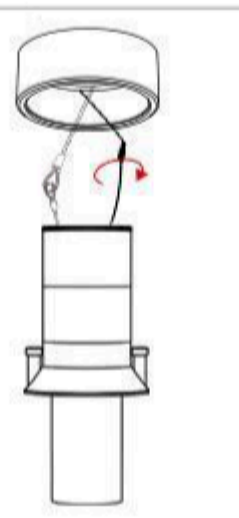
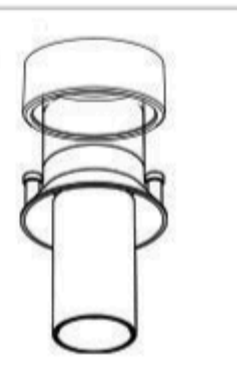



AICO Semi-recessed Stretchable L Installation Manuals







Type 1: Protruded from the ceiling



 1. Cutout on the ceiling cutout size: 75mm (2.95")	 2. Plaste-mesh-putty-paint, finish the ceiling	 3. After the paint dry enough, install the frame
 4. Wire the driver	 5. Plug in the light, and buckle the safety rope	 6. Fix the light on by magnet
 7. Done		

Type 2: Flushed with ceiling

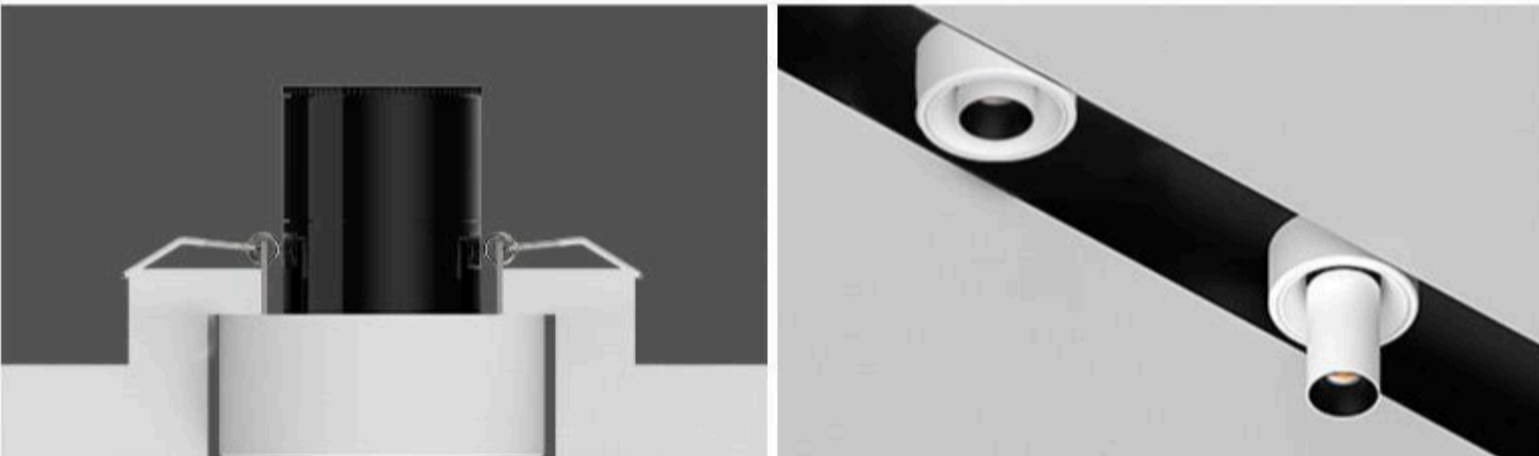

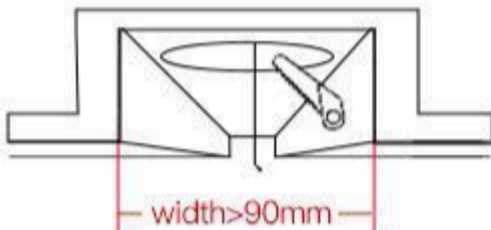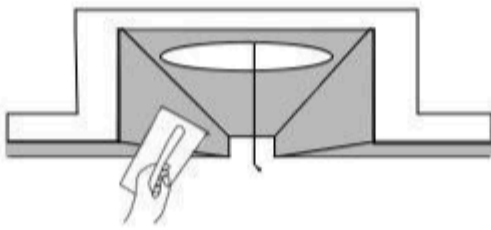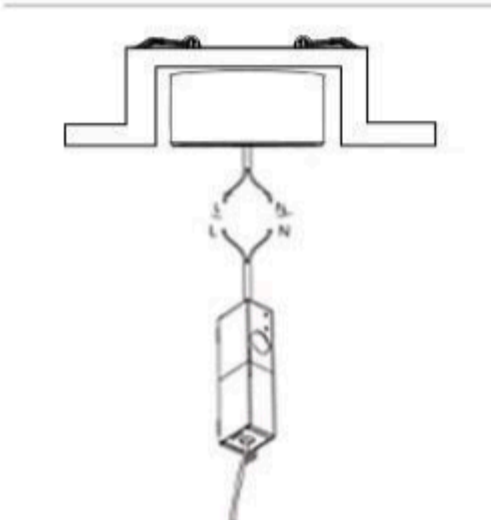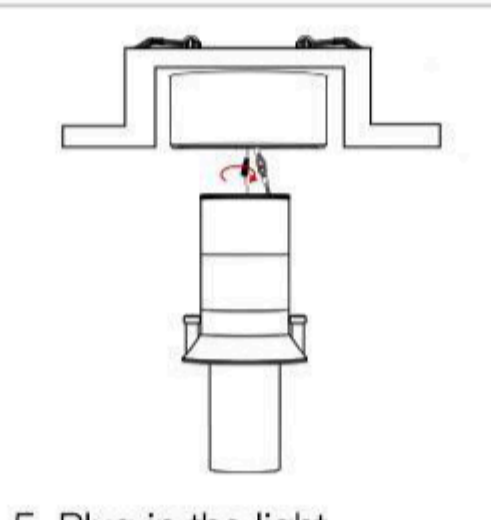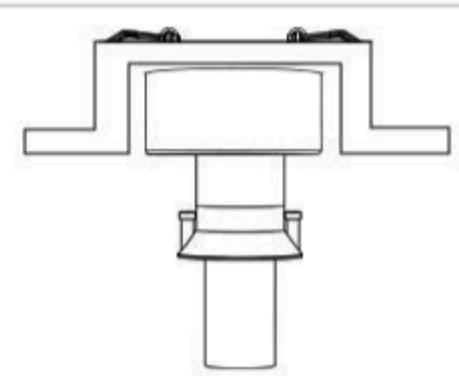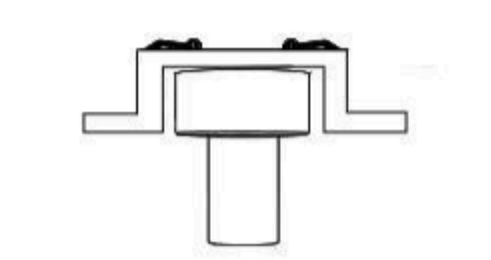 1. Build a channel (width>90mm) on the ceiling, cutout on the ceiling cutout size: 75mm (2.95")	 2. Plaste-mesh-putty-paint, finish the ceiling	 3. After the paint dry enough, install the frame
 4. Wire the driver	 5. Plug in the light, and buckle the safety rope	 6. Fix the light on by magnet
 7. Done		



- To secure safety, a qualified electrician is required to install/remove the luminaire.
- POWER OFF!!! NOT HOT PLUGGING!!!