



AICO


GK _____

AICO	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
GK75	R Round	08	QS Microflange	B Black	B Black	B Bridgelux	90 90+CRI 08 Watts Lumens Divd. ~430	27 ■ 2700K 30 □ 3000K 35 □ 3500K 40 □ 4000K	25 25°	CMEM55 On/Off; Triac PhaseDim; 120VAC KIG On/Off; Triac Phase Dim; 120/277VAC "Remote Placed	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights "For more details, pls refer to page3

GK75-R08QS-W-W-B-90-30-25

Photometry

Beam angle: 25°
Delivered Lumens:430 lumens
CCT: 4000K
CRI: 90
Power: 08W
Efficacy: 531m/w

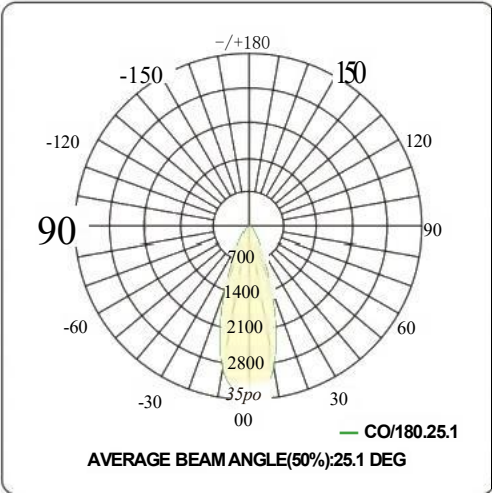

ACCESSORIES

Brackets for New-Construction(4-legs)




NCP-SR3-R21

For AICO trim&trimless


Cutout

Round: 3" (Ø77mm)
 Ø2" (Ø62mm)
 Ø1" (Ø50mm)

Square: □3" (□77mm)

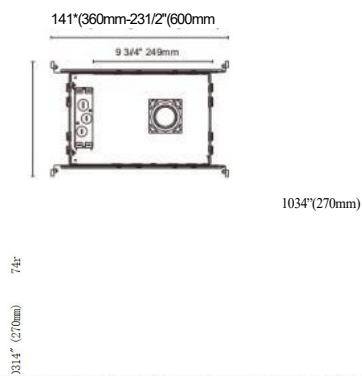

IC-BOX for New-Construction(4-legs)

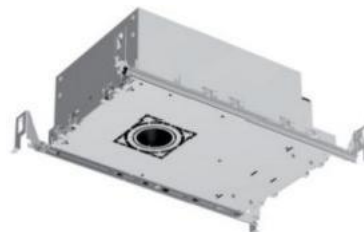


NCBX-SR3-R21

For AICO trim&trimless





Cutout

Round: Ø3" (Ø77mm)
 Ø2" (Ø62mm)
 Ø1" (Ø50mm)

Square: □3" (□77mm)

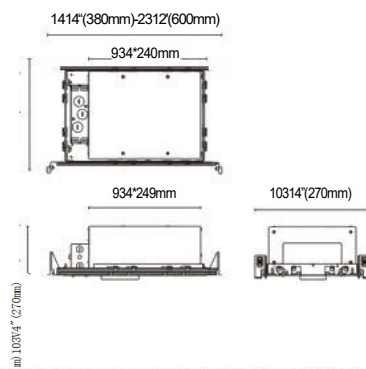

Cut out



Brackets for New-Construction




BRKT-2SR75A

For AICO trim & trimless

Cut out:

Round: Ø77mm*2 (Ø77mm*2)

Square: □77mm*2 (□77mm*2)

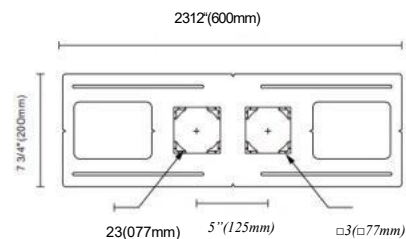



Remark

Tailored brackets are available with a reasonable surcharge, details as below



- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

For more information, please get in touch with amlumen sales.

GK75-R08Qs

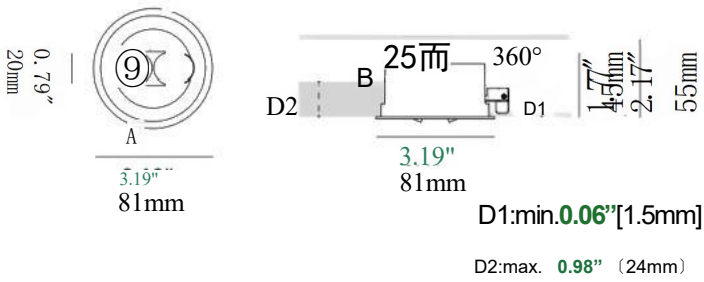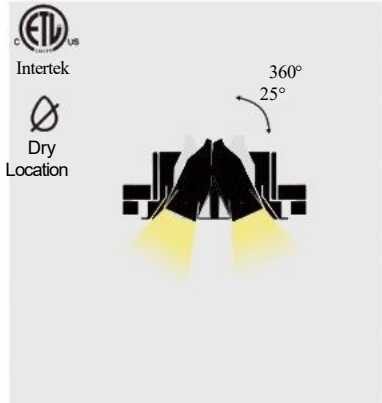




GK75-R08QT

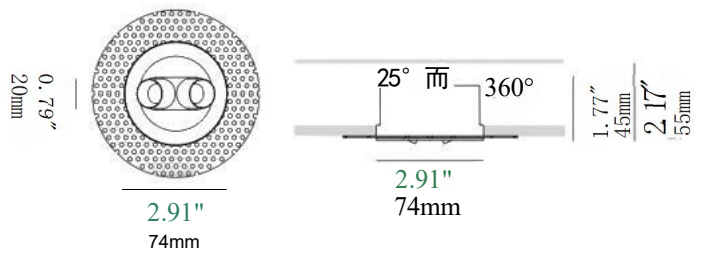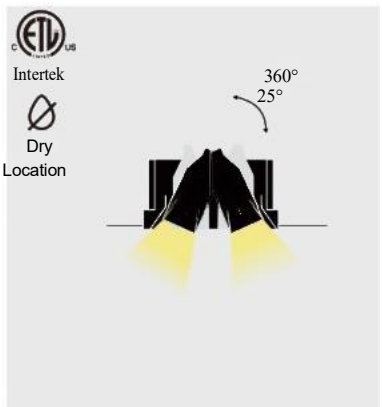

Twins'Four Applications



Microflange

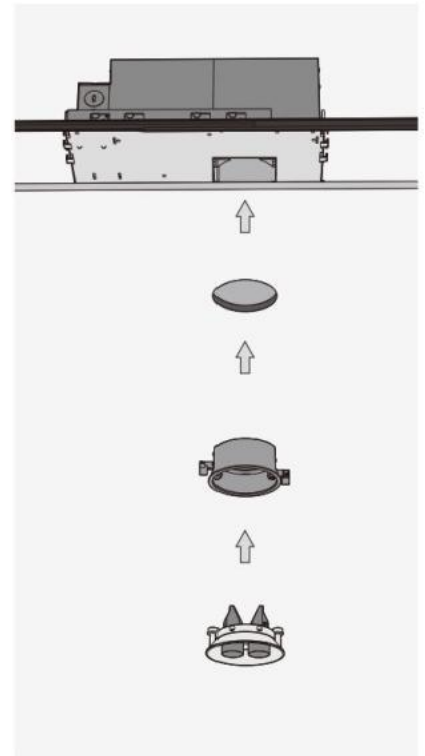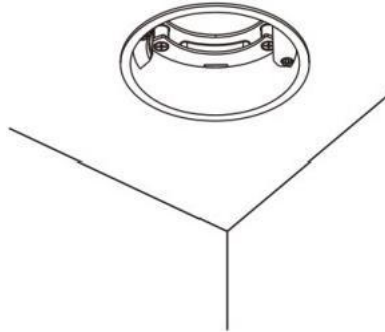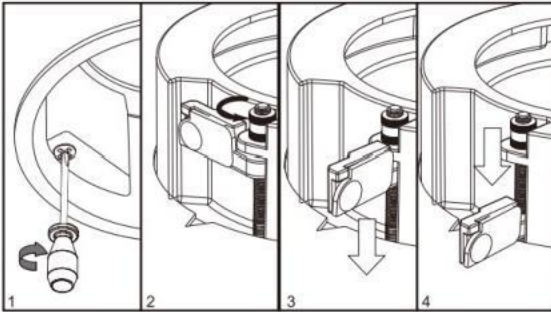

Trimless Drywall

