

GK75-R44QS



GK75-R44QT



GK75-S44QS



GK75-S44QT




AICO

GK - - - - -


AICO	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES
GK75	R Round	44	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1335	27  2700K	50 50°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket NCBX-SR3-R21 IC Box BRKT-2SR75A Non-IC Bracket for Dual Lights <

Photometry


Beam angle: 50°
Delivered Lumens: 1335 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 89lm/W

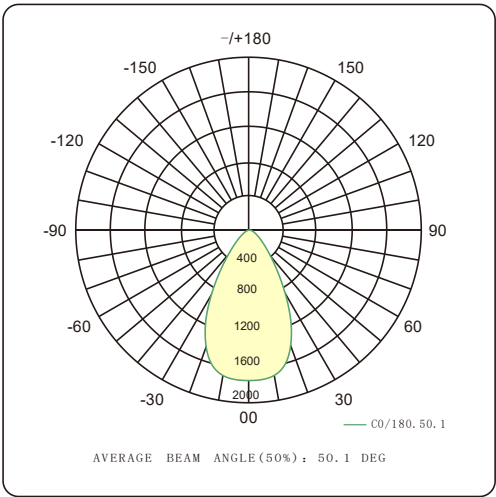

Beam angle: 35°
Delivered Lumens: 1230 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 82lm/W

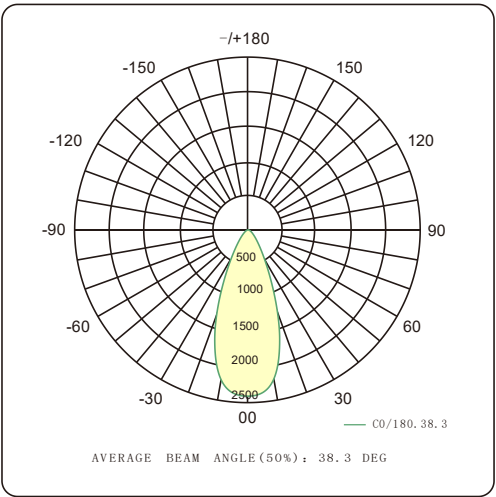

Beam angle: 25°
Delivered Lumens: 900 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 60lm/W

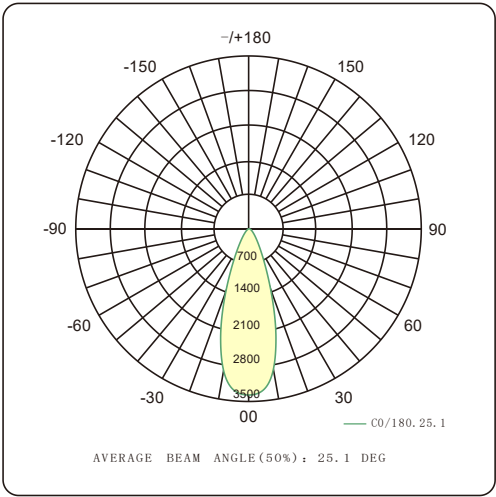

ACCESSORIES

Brackets for New-Construction (4-legs)




NCP-SR3-R21

For P.GEEK trim&trimless


Cut out:

- Round : Ø 3" (Ø 77mm)
 Ø 2" (Ø 62mm)
 Ø 1" (Ø 50mm)

Square : □ 3" (□ 77mm)

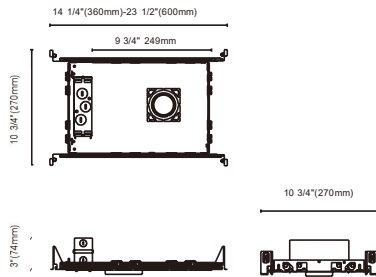

IC-BOX for New-Construction (4-legs)

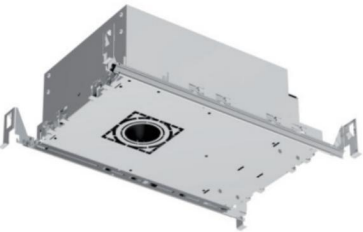



NCBX-SR3-R21

For P.GEEK trim&trimless


Cut out:

- Round : Ø 3" (Ø 77mm)
 Ø 2" (Ø 62mm)
 Ø 1" (Ø 50mm)

Square : □ 3" (□ 77mm)

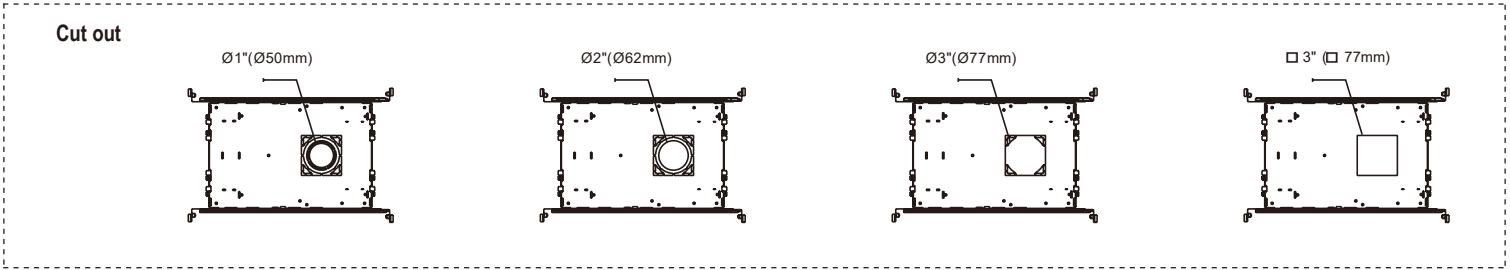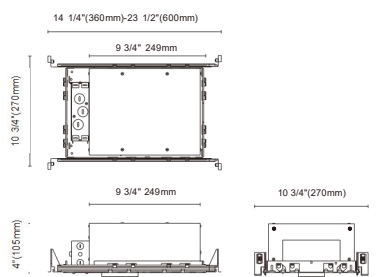

Brackets for New-Construction

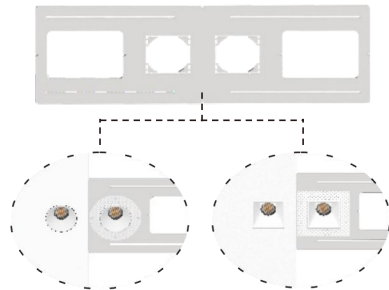


BRKT-2SR75A

For P.GEEK trim & trimless

Cut out:

- Round : Ø 77mm*2 (Ø 77mm*2)
 Square : □ 77mm*2 (□ 77mm*2)

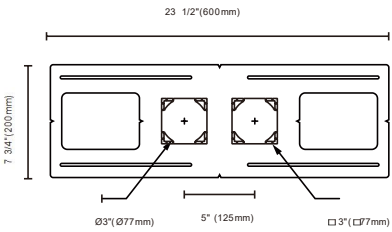



Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests



For more information, please get in touch with AMLUMEN sales.

GK75-R44QS

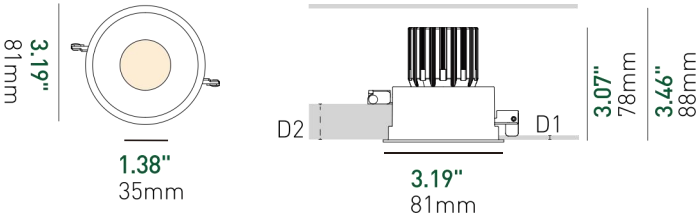
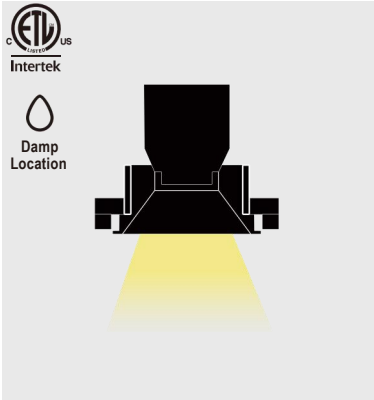


D1:min.0.06" (1.5mm)
D2:max.0.94" (24mm)

GK75-R44QT

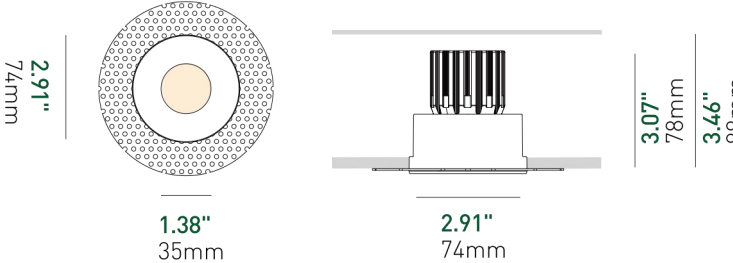
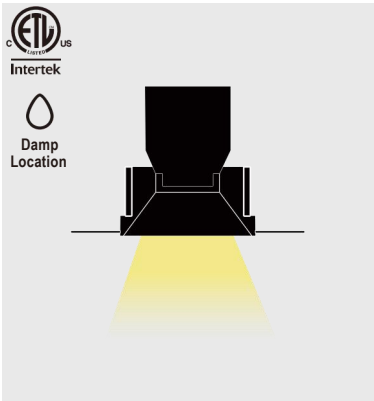


GK75-S44QS


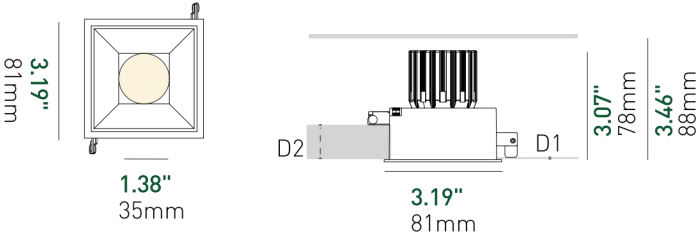
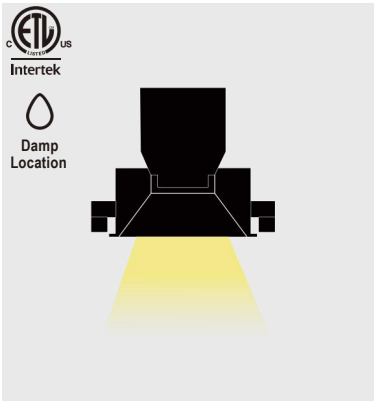


D1:min.0.06" (1.5mm)
D2:max.0.94" (24mm)

GK75-S44QT

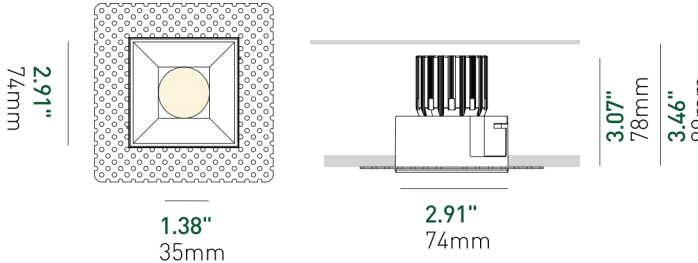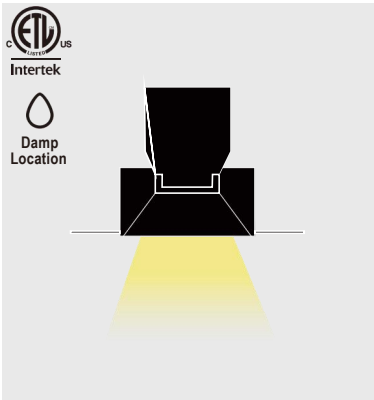

Microflange

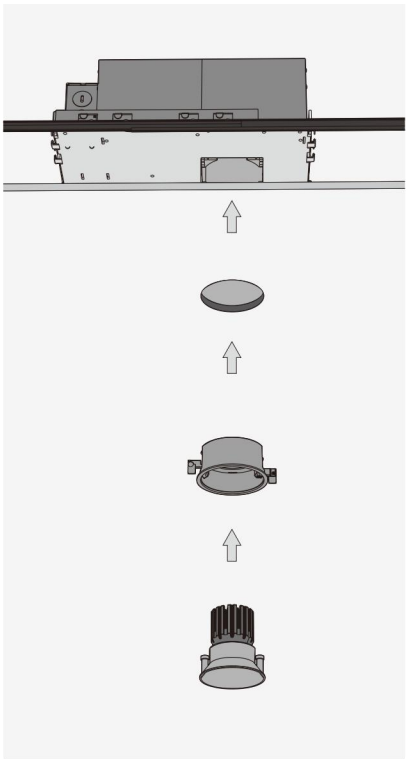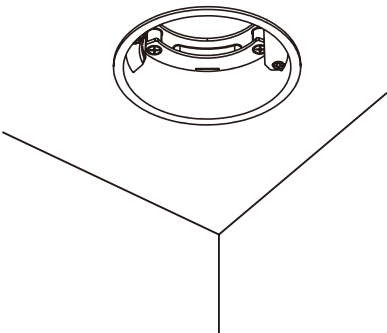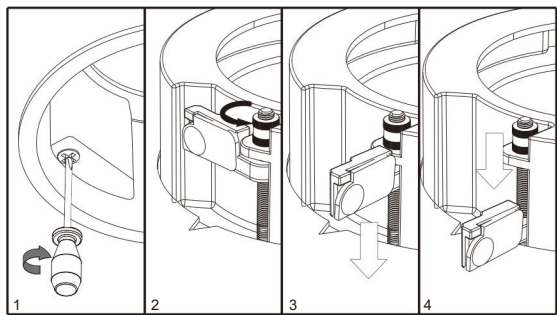

Trimless Drywall

