



AICO Semi-recessed Installation Manuals

Type 1: Protruded from the ceiling

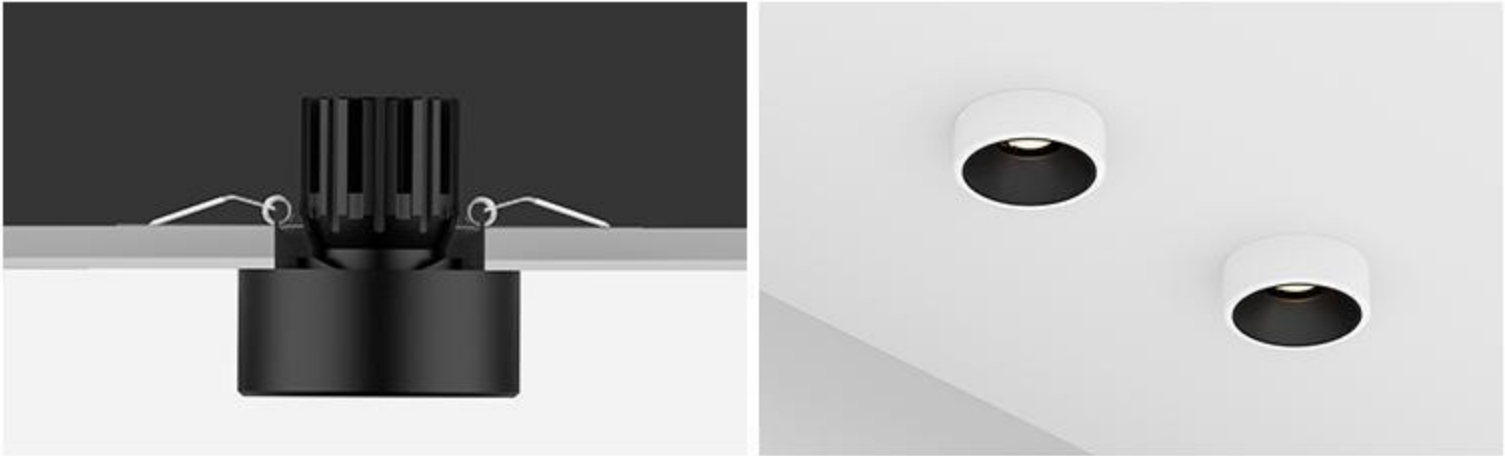

1. Cutout on the ceiling cutout size: 75mm (2.95")	2. Plaste-mesh-putty-paint, finish the ceiling	3. After the paint dry enough, install the frame
4. Wire the driver	5. Plug in the light, and buckle the safety rope	6. Fix the light on by magnet
7. Done		

Type 2: Flushed with ceiling

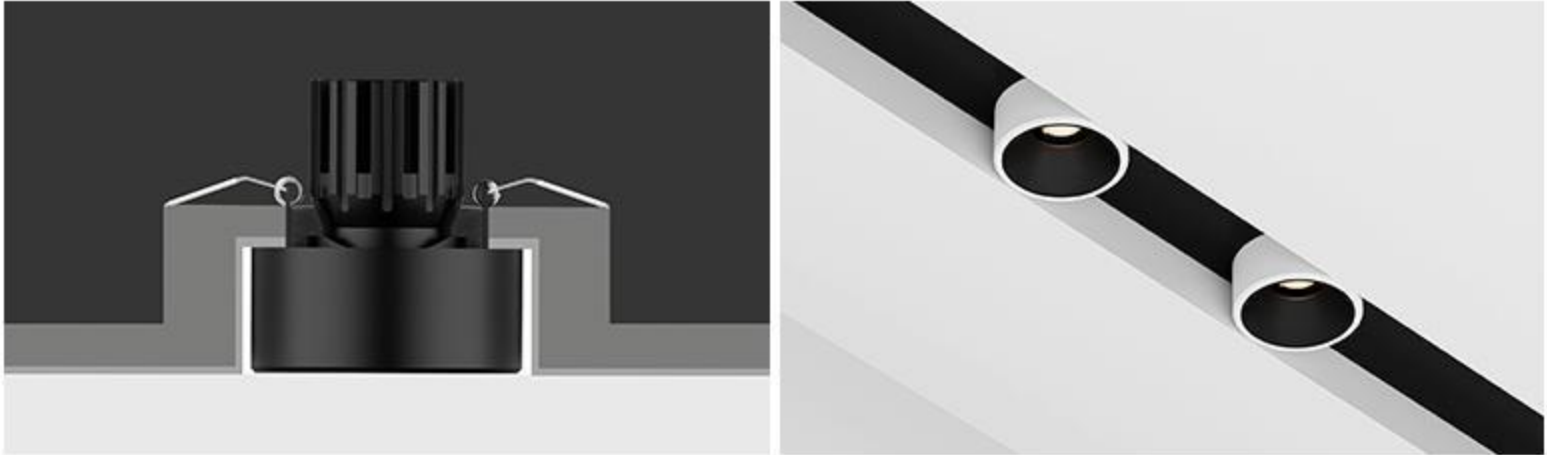

1. Build a channel (width>90mm) on the ceiling, cutout on the ceiling cutout size: 75mm (2.95")	2. Plaste-mesh-putty-paint, finish the ceiling	3. After the paint dry enough, install the frame
4. Wire the driver	5. Plug in the light, and buckle the safety rope	6. Fix the light on by magnet
7. Done		

Note:

1. The embedded part should be placed 1–3mm lower than the gypsum ceiling/drywall.
2. Clean the hole edges while the paint is still wet, for better fitting of the light module.



- To secure safety, a qualified electrician is required to install/remove the luminaire.
- POWER OFF!!! NOT HOT PLUGGING!!!