


AICO

GK ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____ - ____


AICO	SHAPE	VERSION	TRIM	FRAME FINISH	REFLECTOR FINISH	LED CHIP	CRI/LUMENS	CCT	BEAM ANGLE	DIMMING	ACCESSORIES	
GK75	R Round	05	QS Microflange	B Black	B Black	B Bridgelux	90 90+ CRI 15 Watts Lumens Divd.-1380	27  2700K	35 35°	CMEM55 On/Off; Triac PhaseDim; 120VAC	NCP-SR3-R21 Non-IC Bracket	
			QT Trimless Drywall	W White	W White		97 97+ CRI 15 Watts Lumens Divd.-945	30  3000K				
					G Gold			35  3500K	35 35°			
							Dim To Warm	40  4000K				25 25°
							90 90+ CRI 15 Watts Lumens Divd.-750	1830  1800-3000K				
			90 90+ CRI 15 Watts Lumens Divd.-1150 *External 5CCT Selector	2765A  2700K  3000K  4000K  5000K  6500K	35 35°	25 25°	*Dali 2ch Driver Remote Placed	*For more details,pls refer to page 3				
			TUNABLE WHITE	2765  2700-6500K								
GK75-R05QS-W-W-B-90-35-35												

Photometry

Beam angle: 35°
Delivered Lumens: 1380 lumens
CCT: 4000K
CRI: 90
Power: 15W
Efficacy: 92lm/W

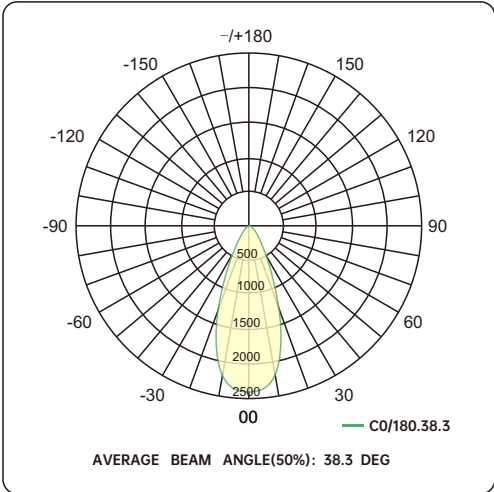


Beam angle: 25°
Delivered Lumens: 945 lumens
CCT: 4000K
CRI: 97
Power: 15W
Efficacy: 63lm/W

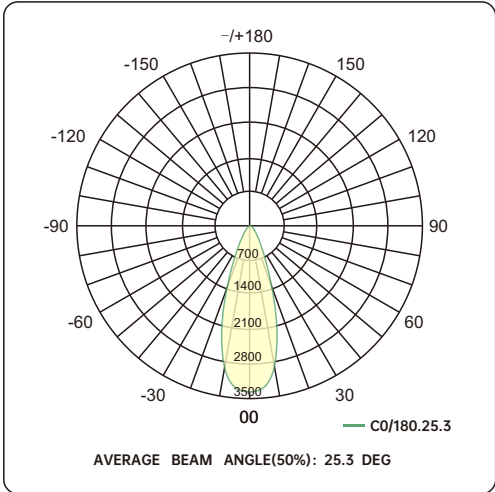

ACCESSORIES

Brackets for New-Construction (4-legs)

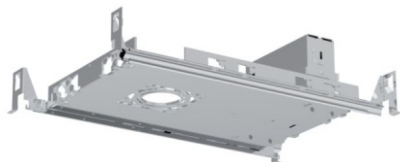


NCP-SR3-R21

For P.GEEK trim&trimless


Cut out:

Round: $\varnothing 3"$ ($\varnothing 77\text{mm}$)
 $\varnothing 2"$ ($\varnothing 62\text{mm}$)
 $\varnothing 1"$ ($\varnothing 50\text{mm}$)

Square: $\square 3"$ ($\square 77\text{mm}$)

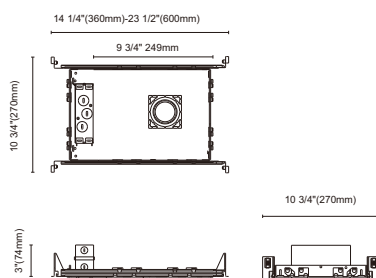

IC-BOX for New-Construction (4-legs)

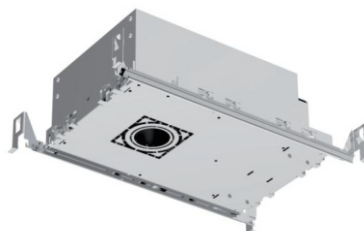


NCBX-SR3-R21

For P.GEEK trim&trimless


Cut out:

Round: $\varnothing 3"$ ($\varnothing 77\text{mm}$)
 $\varnothing 2"$ ($\varnothing 62\text{mm}$)
 $\varnothing 1"$ ($\varnothing 50\text{mm}$)


Square: $\square 3"$ ($\square 77\text{mm}$)

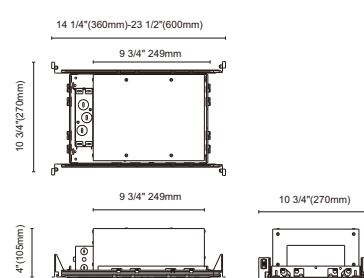


Cut out




$\varnothing 1"$ ($\varnothing 25.4\text{mm}$)



$\varnothing 2"$ ($\varnothing 50.8\text{mm}$)



$\varnothing 3"$ ($\varnothing 76.2\text{mm}$)



$\square 3"$ ($\square 76.2\text{mm}$)

Brackets for New-Construction




BRKT-2SR75A

For P.GEEK trim & trimless

Cut out:

Round: $\varnothing 77\text{mm} \times 2$ ($\varnothing 77\text{mm} \times 2$)

Square: $\square 77\text{mm} \times 2$ ($\square 77\text{mm} \times 2$)

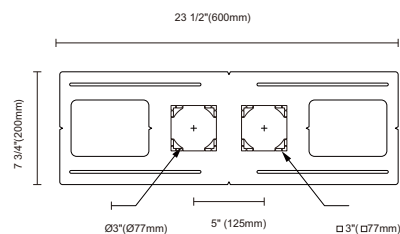




Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests




For more information, please get in touch with XRZLux sales.

GK75-R05QS

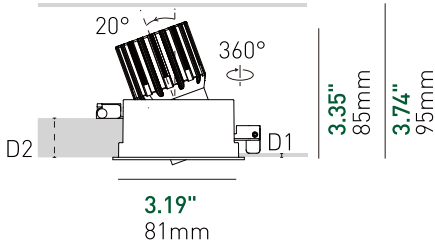

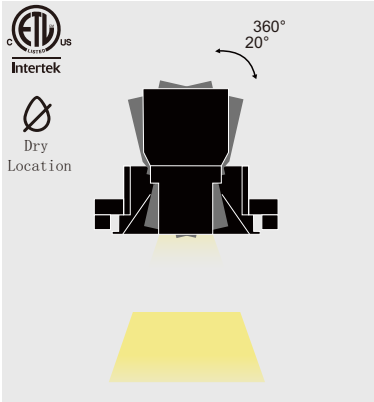


D1:min. 0.06" (1.5mm)
D2:max.0.94" (24mm)

GK75-R05QT

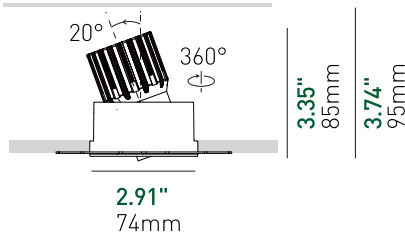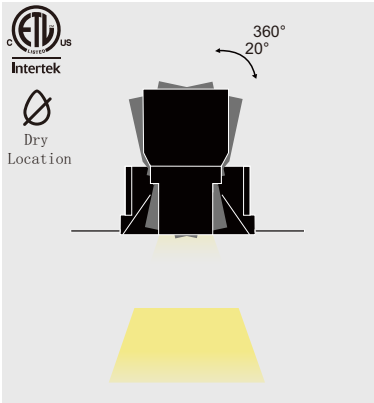

Microflange

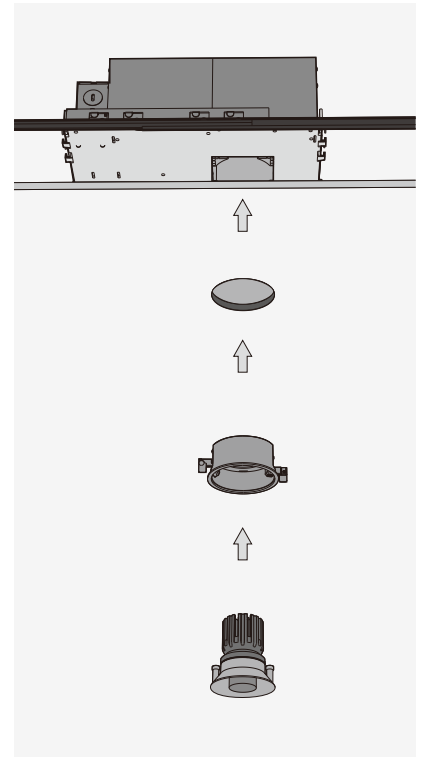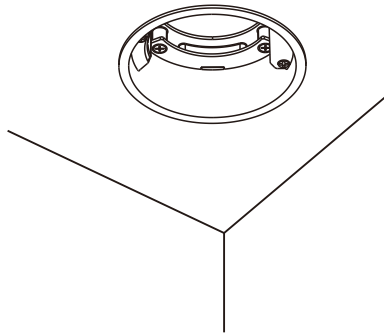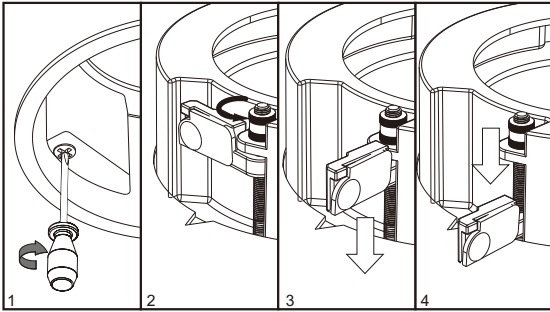

Trimless Drywall

